


DairySpray Teat Spray Controller



DairySpray

- Designed for reliability
- 7" Resistive Touch screen NEMA4/IP65
- Stainless Steel Enclosure 400H x 300W
- Two spray groups.
- 100% reliable optical sensor per stall to determine retention arm status. Can connect to any Automatic Cup Remover system with a 10 to 24Vdc ACR or Retention Arm output.
- Cow force OFF option
- Spray count per milking as well as accumulated spray count
- External control switches for simple operator control.

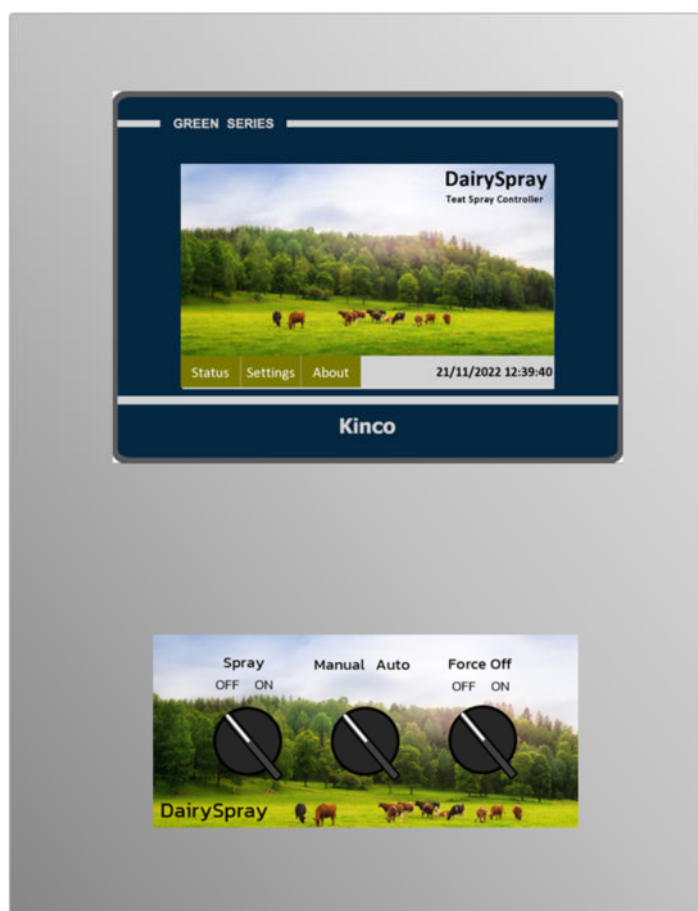

Current Milking		Previous Stall		Current Stall	
0	Stall Count	0	0	0	Distance
0	Spray Count		OFF	OFF	Cow Detect Sensor
			OFF	OFF	Retention Arm
Totals					
0	Total Spray Count	Auto	Ram	Spray	Spray IN
0.000	Total Spray Time	Manual	Pause	Spray	Spray OUT
Cows to Exit					Force OFF
Status					Exit